

# Wireless LAN Access Point [M9-AP3]

## TCP / IP EnOcean Gateway





**Wireless LAN Access Point with ETHERNET interface for use with EnOcean 868 MHz or 902 MHz wireless devices and the MES Venergy UI software.**

### TECHNICAL DATA

Part Numbers (Frequency Dependent)	M9-AP3 (902 MHz - North America) M8-AP3 (868 MHz - Europe and China)
Processor	AM3358 1GHz ARM® Cortex-A8 Processor
Onboard Flash	4GB
Accelerator	NEON Floating-Point
Microcontroller	2x RU 32-bit
RAM	1 GB
Cache	256KB
Dimensions	Length: 5.10" (129.54 mm) Width: 5.05" (128.27 mm) Height: 1.24" (31.496 mm)

### DIMENSIONS

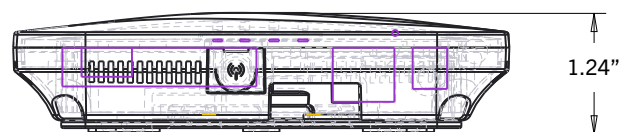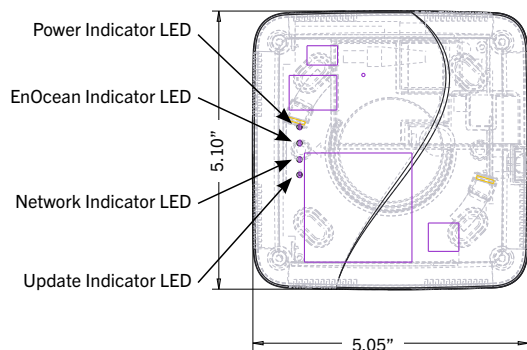

SUBJECT TO CHANGE

# Wireless LAN Access Point [M9-AP3] TCP / IP EnOcean Gateway




## Mounting Instructions

- Screw backplate to wall or ceiling




**NOTE:** Optimal mounting is at or below ceiling height and in conditioned environment.

**NOTE:** Range can vary greatly based on building materials, device positioning, interference, etc.

Reference the [EnOcean Range Planning Guide](#) prior to installation.

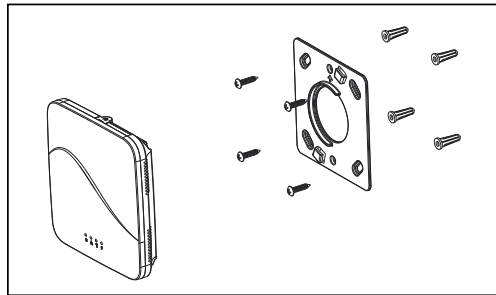

- Attach device to backplate by aligning tabs and twisting / locking into place (see below)

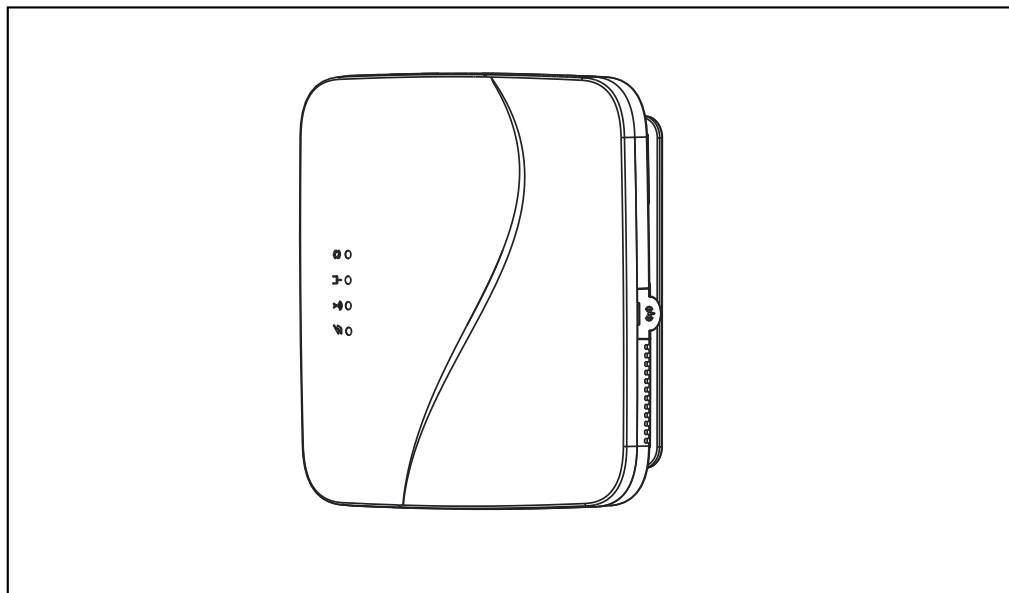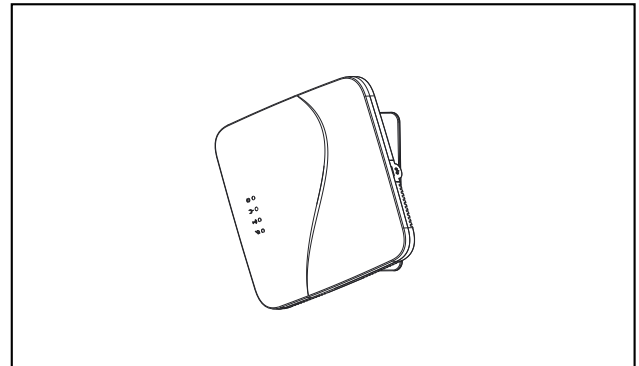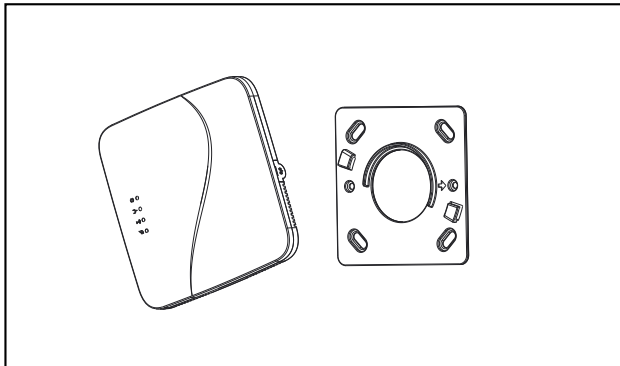

SUBJECT TO CHANGE